

36G

Intermittent Operation



Specification

GEAR RATIO	DMN29B36G □◇		
	RATED TORQUE		SPEED
	N·m	oz·in	r/min
10	0.064	9.04	370
18	0.098	13.9	206
20	0.11	15.3	185
30	0.17	23.6	123
50	0.25	36.2	74.0
60	0.30	43.1	61.7
75	0.38	54.3	49.3
100	0.39	55.6	40.1
120	0.39	55.6	34.0
150	0.39	55.6	28.4
180	0.39	55.6	24.4
200	0.39	55.6	22.2
250	0.39	55.6	18.2
300	0.39	55.6	15.4
400	0.39	55.6	11.7
500	0.39	55.6	9.5
600	0.39	55.6	8.0


※ Enter the required reduction ratio in the □.

※ □ Rotation of gearbox shaft is in reverse of rotation of motor.


※ Enter the required voltage A or B in the ◇.

Outline

DMN29B36G □◇

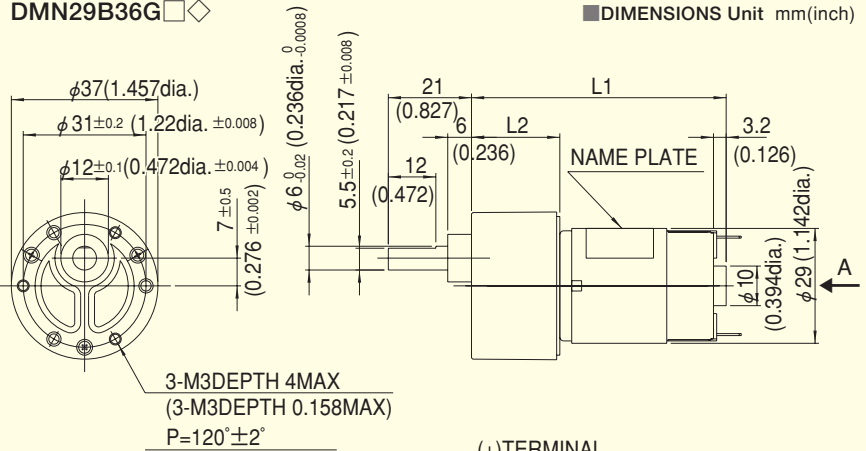

GEAR RATIO	L1		L2		WEIGHT	
	mm	inch	mm	inch	g	lb
10	61.8	2.433	19.8	0.780	190	0.42
18~30	64.3	2.531	22.3	0.878		
50~100	66.8	2.630	24.8	0.976		
120~300	69.3	2.728	27.3	1.075	210	0.46
400~600	71.8	2.827	29.8	1.173		



View A

43G

Intermittent Operation



Specification

GEAR RATIO	DMN29B43G □◇		
	RATED TORQUE		SPEED
	N·m	oz·in	r/min
10	0.064	9.04	370
18	0.098	13.9	206
20	0.11	15.3	185
30	0.17	23.6	123
50	0.25	36.2	74.0
60	0.30	43.1	61.7
75	0.38	54.3	49.3
100	0.39	55.6	40.1
120	0.39	55.6	34.0
150	0.39	55.6	28.4
180	0.39	55.6	24.4
200	0.39	55.6	22.2
250	0.39	55.6	18.2
300	0.39	55.6	15.4
400	0.39	55.6	11.7
500	0.39	55.6	9.5
600	0.39	55.6	8.0


※ Enter the required reduction ratio in the □.

※ □ Rotation of gearbox shaft is in reverse of rotation of motor.


※ Enter the required voltage A or B in the ◇.

Outline

DMN29B43G □◇

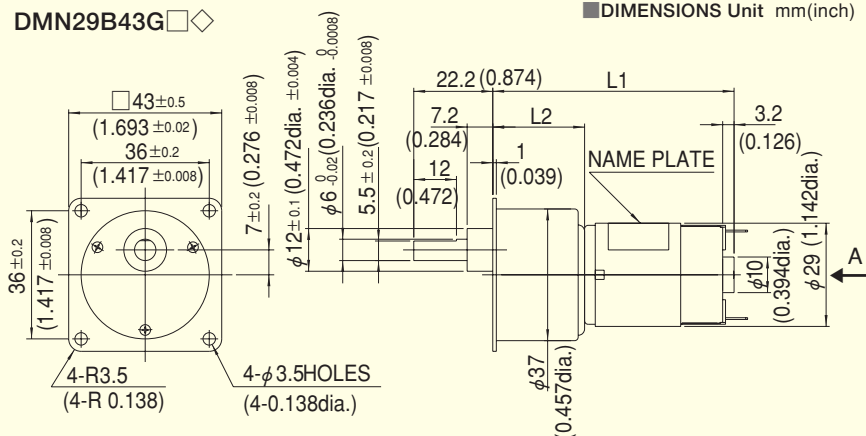

GEAR RATIO	L1		L2		WEIGHT	
	mm	inch	mm	inch	g	lb
10	60.3	2.374	18.3	0.721	190	0.42
18~30	62.8	2.472	20.8	0.819		
50~100	65.3	2.571	23.3	0.917		
120~300	67.8	2.669	25.8	1.016	210	0.46
400~600	70.3	2.768	28.3	1.114		



View A